

FM560CB


PCMCIA Fax Modem 56K

INTRODUCTION

This PCMCIA Fax Modem 56K is a credit-card-size Type II PC card that complies with the PCMCIA 2.1 standards.

The PCMCIA Fax Modem 56K is Bell, ITU-T (formerly CCITT) compliant and Hayes AT command compatible, so that it can be used worldwide with today's popular communication software programs. You will be able to send and receive faxes to/from any

Group 3 compatible fax machine. Using standard phone lines, the data communication functions of the modem will enable you to successfully hook up to the Internet, transmit E-mail, send and receive information and communicate with other PCs, Bulletin Board Services (BBS) or computer networks such as CompuServe

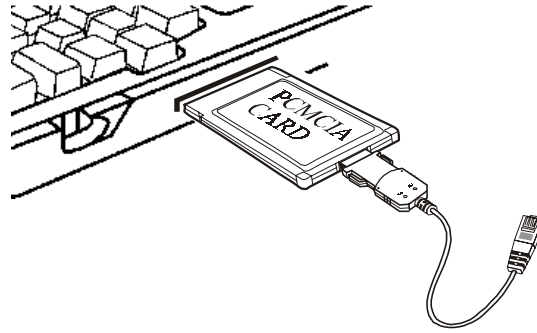

SYSTEM REQUIREMENTS

- A notebook or desktop computer with PCMCIA type II or III slot.
- A telephone line with RJ-11 jack.
- A CD-ROM drive.
- Windows 95, 98, 2000 or Windows NT pre-installed.

SPECIFICATIONS

Data:

K56flex, V.90, V.34bis, V.34, V.32bis, V.32, V.22bis, V.22, and V.21, Bell 212A and Bell 103

Fax:

V.17, V.29, V.27ter, and V.21 channel 2 Group 3 send and receive facsimile

Error Correction:

V.42 and MNP 2-4

Data Compression:

V.42bis and MNP 5

Communication software compatible commands:

Hayes compatible enhanced "AT" command set
Fax Service Class 1 commands

Built-in DTE interface:

DTE speed up to 115,200 bps
16C550 UART interface